

P/N: 18801-0101

Copyright

© 2025, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

Document identity

Publ. No.: 18801-0101

Release: AC

Commit: 108192

Language: en-US

Modified: 2025-10-17

Formatted: 2025-10-17

Website

<http://www.flir.com>

Customer support

<http://support.flir.com>

Disclaimer

Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply. Products described herein may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions.



Imaging and optical data	
IR resolution	320 × 240 pixels
Thermal sensitivity/NETD	< 50 mK
Field of view (FOV)	35° × 27°
Minimum focus distance	0.4 m (1.3 ft)
Spatial resolution (IFOV)	2.0 mrad/pixel
F-number	1.4
Image frequency	9 Hz
Focus	Focus free
Digital zoom	Yes, zoom pinch, 1–4× continuous
Detector data	
Detector type	Focal plane array, uncooled microbolometer
Spectral range	7.5–13 μm
Detector pitch	12 μm
Image presentation	
Display resolution	640 × 480 pixels
Screen size	3.5 in
Aspect ratio	4:3
Auto orientation	Yes
Touch screen	Yes, capacitive
Display technology	IPS
Image adjustment	<ul style="list-style-type: none"> Automatic level and span Manual level and span 1-Touch level and span
Image modes	<ul style="list-style-type: none"> Infrared image Visual image MSX Picture in picture (IR area on visual image)
Gallery	Yes, incl. thumbnails and custom folder structure

P/N: 18801-0101

© 2025, FLIR Systems, Inc.

#18801-0101; r. AC/108192; en-US

Measurement	
Object temperature range	-20 to 450°C (-4 to 842°F)
Accuracy at ambient temp. 10 to 35°C (50 to 95° F) and object temp. above 0°C (32°F)	<ul style="list-style-type: none"> 0 to 100°C (32 to 212°F): ±2°C (±5.5°F) 100 to 450°C (212 to 842°F): ±2%
Measurement analysis	
Measurement functions	<ul style="list-style-type: none"> Spot Box with max./min. Isotherm
Measurements correction	<ul style="list-style-type: none"> Emissivity; matt/semi-matt/semi-glossy + custom value Reflected apparent temperature <ul style="list-style-type: none"> Atmospheric compensation
Color palettes	<ul style="list-style-type: none"> Iron Gray Rainbow Arctic Lava Rainbow HC
Set-up	
Set-up commands	<ul style="list-style-type: none"> Local adaptation of units, language, date and time formats Screen brightness (high, medium, low)
Languages	Arabic, Czech, Danish, Dutch, English, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese, Russian, simplified Chinese, Spanish, Swedish, traditional Chinese, Turkish
Service functions	
Camera software update	<ul style="list-style-type: none"> Automatic over Wi-Fi USB via computer
Storage of images	
Storage media	Internal memory and onboard Flir Ignite cloud connectivity with Wi-Fi.
Image storage capacity	> 5000 sets of images
Image file format	Standard JPEG, 14-bit measurement data included
Image annotations	
Text	Soft keyboard on touchscreen, auto-prompt for note when image is saved
Video streaming	
Non-radiometric video streaming	Yes; MSX, Thermal, Visual, Picture in Picture. USB Video Class colorized uncompressed with overlay 9 Hz.
Digital camera	
Resolution	5 MP
Focus	Fixed
Field of view	71.5 ° × 56° (84° diagonal)
Video lamp	Yes



FLIR C8

P/N: 18801-0101

© 2025, FLIR Systems, Inc.

#18801-0101; r. AC/108192; en-US

Data communication interfaces	
Wi-Fi	802.11 a/b/g/n (2.4 and 5 GHz)
USB	USB 2.0, Type-C connector
Bluetooth	Bluetooth v. 5.0 EDR <ul style="list-style-type: none"> PAN
Radio	
Operating frequency	Bluetooth: 2402–2480 MHz WLAN 2.4 GHz: 2412–2462 MHz WLAN 5 GHz: 5150-5250 MHz Note that frequency band 5150-5250 MHz is for indoor use only, see national regulations (e.g. Japan and Canada)
Power system	
Battery type	Rechargeable Li ion battery (built-in)
Battery voltage	3.7 V
Battery capacity	1800 mAh
Battery operating time	3 hours
Battery charge life	>500 cycles
Charging system	USB-C (1 A)
Charging time	2 hours
Charging temperature	35°C (95°F)
External power operation	5 V, USB-C
Power management	Adjustable stand-by and automatic shut-down
Battery documents	For documents like MSDS and UN38.3 test reports/summaries, see: https://support.flir.com/resources/msds
Environmental data	
Operating temperature range	–10 to 50°C (14 to 122°F)
Storage temperature range	–40 to 70°C (–40 to 158°F)
Humidity (operating and storage)	IEC 60068-2-30/24 h 95% relative humidity 25°C to 40°C (77°F to 104°F) / 2 cycles
Relative humidity	95% relative humidity 25°C to 40°C (77°F to 104°F) non-condensing
EMC	<ul style="list-style-type: none"> EN 301 489-1 RED EN 301 489-17 FCC 47 CFR Part 15 B, Class B
Magnetic fields	EN 61000-4-8 level 5
Radio spectrum	<ul style="list-style-type: none"> ETSI EN 300 328 EN 301 893 FCC Title 47 CFR Part 15 RSS-247
Battery regulations	<ul style="list-style-type: none"> UL 1642 EN 62133 ed 2
Battery charging efficiency	<ul style="list-style-type: none"> BC Title 20 10 CFR Section 430.23 (aa)
Encapsulation	Camera housing and lens: IP 54 (IEC 60529)
Shock	25 g (IEC 60068-2-27)



FLIR C8

P/N: 18801-0101

© 2025, FLIR Systems, Inc.

#18801-0101; r. AC/108192; en-US

Environmental data	
Vibration	2 g (IEC 60068-2-6)
Drop	Designed for 2 m (6.56 ft)
Safety	EN 62368-1
Environmental safety	<ul style="list-style-type: none">REACH Regulation EC 1907/2006RoHS2 Directive 2011/65/ECWEEE Directive 2012/19/ECProposition 65
Declaration of conformity	See: https://support.flir.com/resources/DoC


Physical data	
Weight	0.20 kg (0.42 lb)
Size (L x W x H)	138 x 84 x 34 mm (5.4 x 3.3 x 1.3 in)
Battery weight	40 g (1.4 oz)
Tripod mounting	UNC 1/4"-20
Housing material	<ul style="list-style-type: none">PC and ABS, partially covered with TPEAluminum
Color	Black

Warranty and service	
Warranty	http://www.flir.com/warranty/

Shipping information	
Packaging, type	Cardboard box
Packaging, contents	<ul style="list-style-type: none">FLIR C8Printed documentationWrist strap lanyardUSB cablePouch
Packaging, weight	0.52 kg (1.14 lb)
Packaging, size	160 x 118 x 93 mm (6.3 x 4.6 x 3.7 in)
EAN-13	4743254007727
UPC-12	845188033576
Country of origin	Estonia

Supplies & accessories:

- T911940ACC; USB 2.0 A to USB Type-C cable, 1.0 m
- T300341; FLIR Thermal Studio Standard, 1 Year Subscription
- T850155; Flir Ignite Pro 100 GB with Professional Reporting, 1 Year Subscription.
- T850118; Flir Ignite 10 GB, 1 Year Subscription.
- T850116; Flir Ignite 100 GB, 1 Year Subscription.
- T132572ACC; Flir C8 Pouch.
- PROTECT-C8; Flir Protect, 3 Year Extended Warranty for Flir C8.

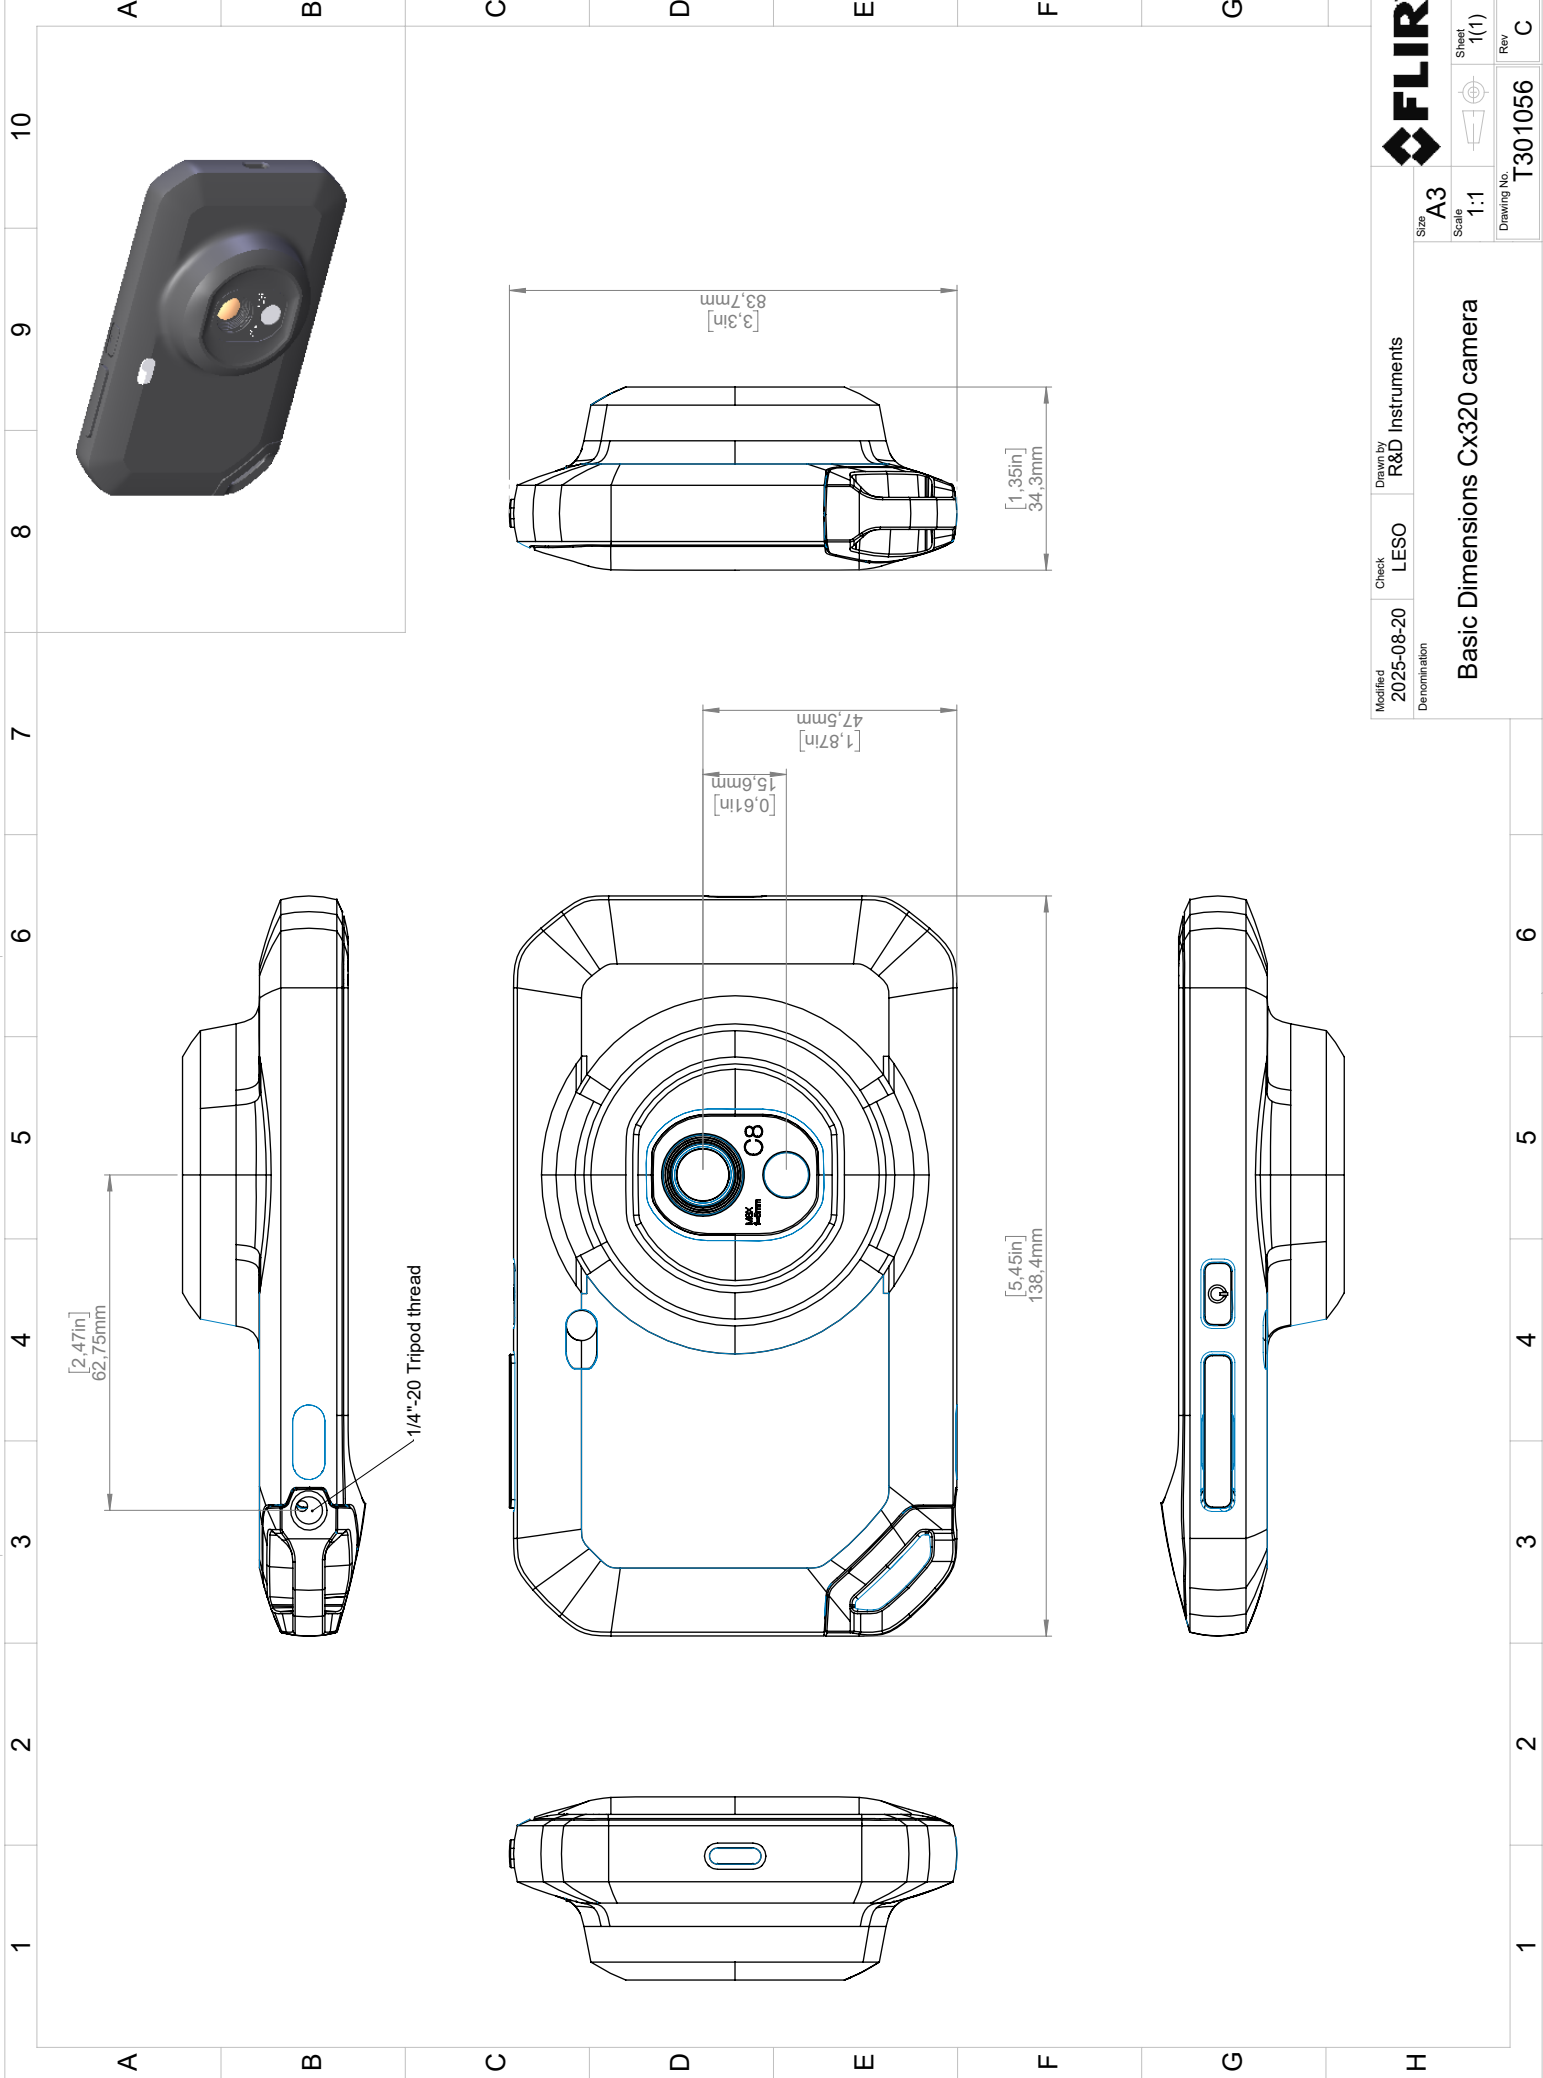

Modified	Check	Drawn by	FLIR
2025-08-20	LESO	R&D Instruments	
Denomination			
Basic Dimensions Cx320 camera			
Size	A3	Sheet	1(1)
Scale	1:1	Rev	C
Drawing No.	T301056		